

86 KUJ/115 HP	$\mathbf{PRO}$
6100-6250 KG	



TEAM DIVERTO	4
OUR STORY	6
THE WORLD CHANGES, CHANGE WITH IT	8
PERFORMANCE MATTERS	10
A MAN AND HIS MACHINE	12
TRANSFORM IN 60 SECONDS	14
360 UNLIMITED	16
TOTAL CONTROL	18
CLEAN PERFORMANCE ENGINE	20
EVERY SEASON IN POLE POSITION	22
EQUIPPED FOR A FERTILE SPRING	24
EQUIPPED FOR A HOT SUMMER	26
EQUIPPED FOR A ROUGH AUTUMN	28
EQUIPPED FOR A HARSH WINTER	30
PANORAMA	32
SAFE AND COMPACT	34
SIDE BY SIDE	36
FULL PROPORTIONAL CONTROL	38
HIGH QUALITY COMPONENTS	40
WORK HARD AND SMART	42
HYDRAULIC POWER	44
TRACTOR	46
EXCAVATOR	48
WHEEL LOADER	50
BOOM MOWER	52
SUPERIOR SERVICE	54
COMFORT CLASS LEVELS	56
DIVERTO STYLE OF WORKING	58
WARRANTY AND FINANCING	64
TOOL PARTNERS	66
SPECIFICATIONS	68

## TEAM DIVERTO

DIVERTO STANDS FOR CHANGING DIRECTION, DARING TO BE DIFFERENT, BEING UNLIKE ANYTHING ELSE. THAT'S HOW WE WORK!



A changing world provides opportunities in terms of equipment solutions that are smarter and more efficient, offering unrivalled performance. At DIVERTO, we are fully committed to developing progressive machinery. We embrace taking risks to make the seemingly impossible possible. We all believe that your DIVERTO should be an absolute joy to work with, every single day of every season.

Our goal to build and market breakthrough innovations is made possible with the help of our assembly partner and co-shareholder, VDL Groep. They understand that revolutionary products demand a long-term commitment. VDL Groep focuses on the development of semi-finished and finished products, such as buses, coaches, and the production of assembly line equipment for brands like Jaguar, Land Rover, Ford and Volvo. They also assemble cars for BMW. Since its founding in 1953, this family-owned company has grown to include 82 operating companies, situated in over 18 countries, employing over 9,100 staff.

Together, DIVERTO and VDL design, engineer, manufacture and test products to the highest European quality standards. All our work is carried out in The Netherlands.

What are your needs and how can we help improve your experience? Why not contact us and discuss the options over a cup of coffee!

#### Enjoy the ride. Team DIVERTO.








Modelrights World Wide

2. Four new patent applications

resources' output.

The current economic environment challenges us to stay innovative. In these tougher times we all need to ensure that generations to come will be able to enjoy our planet. DIVERTO actively supports a cleaner environment and will continue to play a significant role by creating sustainable engineering solutions.

Tier-4 /Stage IIIB emission legislation requires extremely clean engines. This means after-treatment solutions such as Exhaust Gas Recirculation (EGR), Diesel Oxidation Catalyst (DOC), Diesel Particulate Filters (DPF), a Selective Catalytic Reduction (Ad Blue) or a combination of these. Such solutions require larger cooling packages, new on-board electronics and increased service intervals. Due to regulations, every single purpose machine or every single transport vehicle with a combustion engine becomes more expensive.

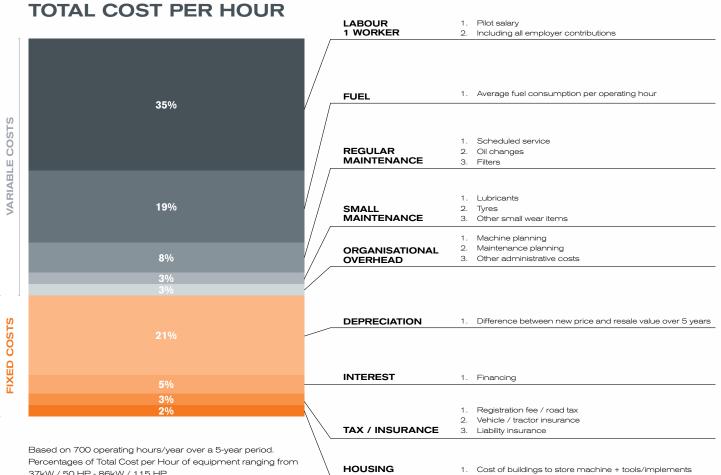

37kW / 50 HP - 86kW / 115 HP.

COSTS

cover fixed costs.

DIVERTO offers a a new style of working to cope with your fixed and variable costs and to optimise your

In general, salaries, fuel prices and other overhead costs are on the rise, and if organisations wish to remain profitable in the long run, it is imperative that we reduce variable costs, while maximising capacity utilisation to

#### Specification

#### GENERAL

Gross Engine Power Gross Torque Top speed Fuel Tank Capacity Hydraulic Tank Capacity Hydraulic System Pressure First Auxiliary Flow

#### EXCAVATOR

Digging / Cutting height Horizontal digging reach ground Digging depth Crowd force dipperstick Bucket digging force

#### LOADER

Height Hinge Pin \*Tipping load straight Pallet Full \ Bucket breakout force

#### TRACTOR

Lift capacity 24" behind pins

PTO output at 540/1000 RPM

#### MOWING

Horizontal Mowing reach with H

### PERFORMANCE MATTERS

Diverto's challenge is to provide the pilot state of the art tools, facilitating smooth change from one application to another without compromising on functionality. Not bound by an existing platform, we have designed and engineered the QS100 from scratch. We have developed, tested, improved and again tested the QS100 for five years.

The basic principle is that the performance of each of the DIVERTO QS100's functions must be equivalent to the standard single purpose platforms.

In addition, the four main functions of the DIVERTO QS100 - Excavator, Loader, Tractor and Mower - must have synergy. Every component installed is used in all of its four applications.

The DIVERTO QS100 can be summarised as: on-road and off-road Mobility, Ergonomics, Compactness, Intuitive Controls and True Performance.

Note: The market averages displayed in the table on the opposite page are based on the DIVERTO QS100's market segment. The averaged data have been derived from the 2013 brochures: Hitachi Zaxis 52U, Caterpiller 305D CR, Kubota U55-4, Doosan E55W, Hyundai 55W-9, Wacker Neuson 6503, Volvo L25F, Ahlmann AS50, Kramer Allrad 480, Komatsu WA65, Bobcat S850, Fendt 210 Vario, Valtra A93 Hi Tech, John Deere 5101E Limited, John Deere 5100M, JCB 2CXS, John Deere 310K EP, McConnel PA60, Mulag MFK500, Noremat Tonica 50, Unimog U20, HIAB XS044, Palfinger PK4200.

			0%	50%	100%	150%	200%
	Units	DIVERTO	TII		T	<u>T</u>	Ī
	kW	86				167%	
	Nm	481				181%	
	km/h	40			143		
	L	150				54%	
	L	130				21	6%
	bar	250				11%	
	L/min	120				189%	
	mm	5400		98			
nd	mm	5800		99			
	mm	3200		88%			
	Kn	22		83%			
	Kn	41		100			
	mm	3156		97			
Wheel Turn	Kg	2200		88%			
	Kn	36		91%			
	Kg	2500		99			
I	kW	48		77%			
Hor. Mower	mm	5700		97	%		

MARKET AVERAGE

\* NOTE: with counter weight or support wheels.



#### ALL GENERATIONS OF PILOTS SHOULD ENJOY GREAT MACHINE OUTPUT COMBINED WITH INCREDIBLE COMFORT AND INTUITIVE CONTROLS.

#### THE MAN AND HIS MACHINE

We place you at the heart of the machine, giving you absolute control. Irrespective of whether you are at the controls inside the cabin, or operate the machine remotely, we have made sure that physical labour is minimised.

Once at ease with the DIVERTO QS100's functionalities, you have a platform that can be geared to your wishes by selecting different kinds of program settings and priorities. We keep on developing optional software packages to carry out ever more complex work and provide applications beyond your wildest dreams.

We give you the power of ultimate freedom and flexibility with unlimited possibilities, both on road and off road.

The Diverto QS100 is **certified as a regular T1 tractor**, which means that you may drive it on public roads at 40 km/h. Please check with your local authorities which type of driving licence is required in your country.

IMAGINE TRANSFORMING A DEDICATED EXCAVATOR BOOM GEOMETRY INTO A 100% WHEEL LOADER GEOMETRY IN JUST 60 SECONDS.

## TRANSFORM IN 60 SECONDS

That is exactly what you get with a DIVERTO QS 100. All you need to do is press the button. Once the transformation is complete, the controls are automatically set for the mode chosen, with the proportional control that you are used to.



PATENTED

Triple patented by DIVERTO.

Boom construction and cylinder



A TRUE EXCAVATOR ROTATES AN UNLIMITED 360°. THIS FREEDOM OF MOVEMENT IS ALSO AVAILABLE FOR ANY TOOL YOU CONNECT TO THE QUICK COUPLER.

## 3600 WLIMITED

Imagine front loading or rear loading gravel, sand, or soil, and spreading or dumping it at any side. Consider a boom mower you can manoeuvre at any angle you wish. Save time moving the machine and get around corners and obstacles with great ease.

A pure excavator, boom mower and loader at 360° constitute three main functions. To arrive at Quattro functionality in a single platform, we have incorporated a pure tractor. The beauty of it all is that you have all this at your disposal, anytime and anywhere you use the three boom applications. That's what we call

Synchronisation.





The 3-Point Hitch has standardised category II dimensions. It lifts and it floats. Any tool can be pulled while following the ground like a mower, a tiller or a stone burrier. The 3-point hitch also has a push function. By coupling a loader bucket, you can create additional stability while digging.

The Power Take-off can be set at 540 or 1000 rpm. It is powered hydrostatically, thus protecting the engine when it is providing energy to tools for high load applications.

Compared to a standard tractor, DIVERTO offers an extremely spacious cab with an airsuspended seat in two directions. You can choose which way to drive, simply by selecting the "reverse" steering switch. This gives you great forward view on any 3-point hitch tool in "reverse" steering mode while maintaining the steering logic for that direction.

All these QUATTRO SYNCHRO functionalities are exclusively patented worldwide by DIVERTO.



THE REMOTE CONTROL UNIT ENABLES YOU TO HANDLE ALL MACHINE MOVEMENTS WITH ANY KIND OF TOOL WITHOUT THE NEED TO STAY IN THE CABIN. CONTROLLING THE MACHINE HAS NEVER BEEN EASIER. THE UNIT IS ERGONOMICALLY DESIGNED, WITH ALL ITS FUNCTIONS IDENTICAL TO THE CABIN JOYSTICKS. EXPERIENCE A SAFER AND BETTER VIEW.

### TOTAL CONTROL

Health and safety regulations are becoming increasingly stringent to protect workers from extremely demanding physical labour. Picking up and placing heavy loads is made easy using the precision remote control unit. It reduces worker fatigue and potential illness while increasing enthusiasm and motivation. A patent pending exclusive by DIVERTO.



A vertical exhaust filters gases from the cabin. Packaging is Diverto patented.

An air filter is situated opposite the exhaust for fresh cool air.

Proportionally regulated hydraulic cooling fan motor, speed adapts to requirement to save fuel.

> All components are packaged to eliminate a counterweight and protected by a strong superstructure. Diverto patented.









Air-conditioning and heating unit lets in fresh clean air far away from the exhaust.



## CLEAN PERFORMANCE ENGINE



John Deere Power Tech 4045 incorporating a 4-cylinder 4.5 litre T4i Turbo engine with four valves per cylinder and two balancing shafts for a visibility 115 HP/86 kW Gross power with exceptional 481Nm Torque.


Exhaust Gas Recirculation, Diesel Oxidation Catalyst and Diesel Particulate Filter reduce the Particulates (PM) of the DIVERTO QS100 by almost a factor 10 compared to engines below 74 HP/55kW. Complying with EPA and EU emission regulations, the DIVERTO QS100 is also a lot cleaner than much smaller engines in terms of NOx + HC gases. A cleaner planet means a healthier working environment for you and your colleagues.

The DIVERTO QS100 uses a patent pending pump configuration on both sides of the engine, as a result of which the engine can be mounted low, providing a low centre of gravity over the large rear tyres. In addition, all four hydraulic pumps and engine filters are in easy reach facilitating maintenance.

## EVERY SEASON IN POLE POSITION

GENERAL

MAIN APPLICATIONS

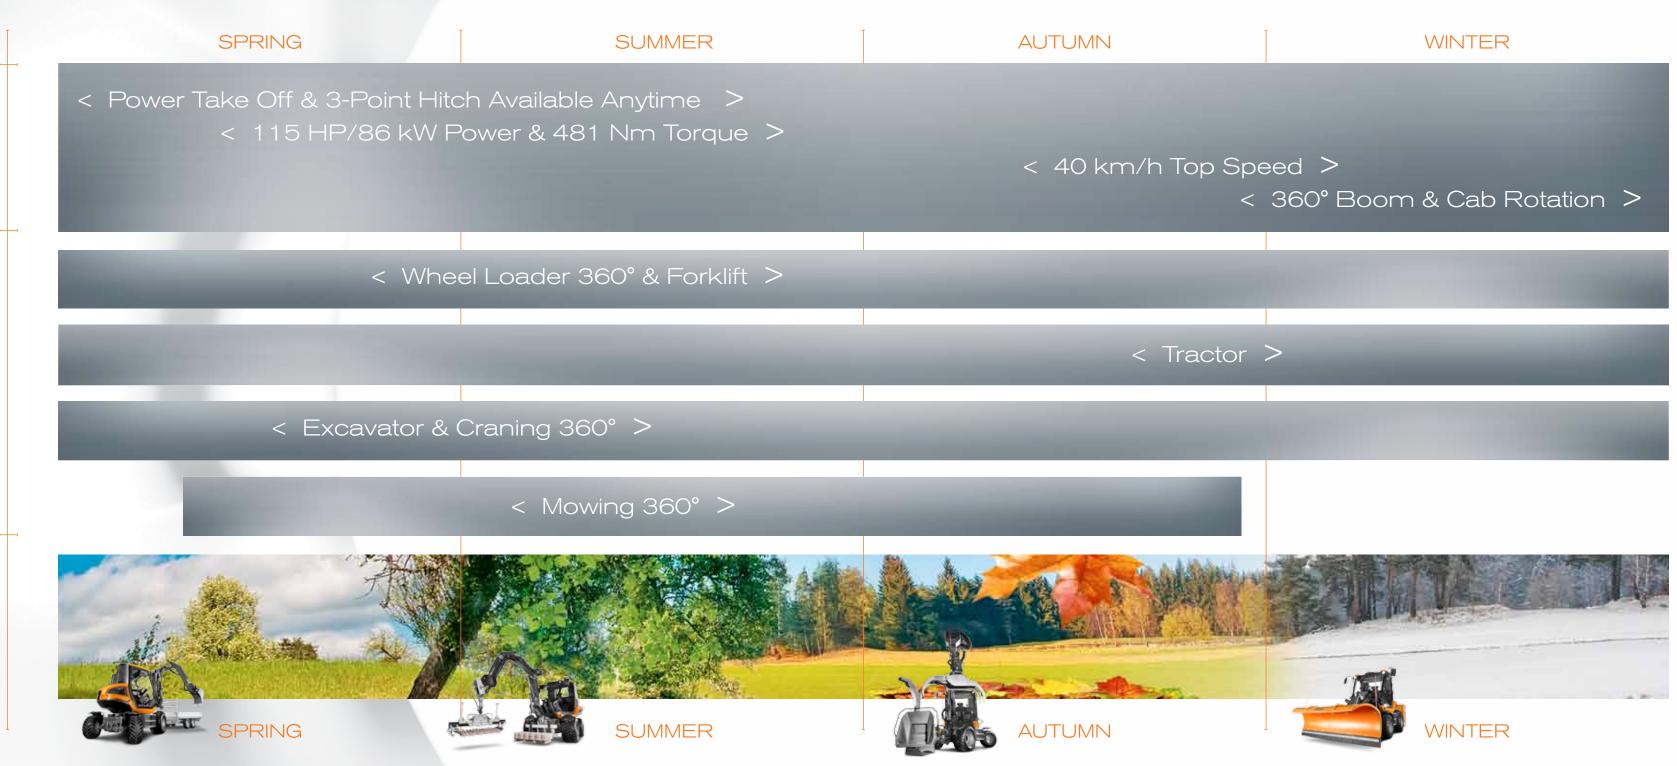

23



ON ROAD HOMOLOGATED TRACTOR WITH 40 **KM/H TRAILERING** UP TO 5 TONS

## 360°

UNLIMITED BOOM AND CABIN ROTATION

TOTAL REACH OF 6 M

EVERYTHING.

The QS100 - with just a 6.2 ton mass - is agile and exerts low ground pressure. It is ideal for parks, golf courses, ranches and farms. Simply jump in with a team of two to get the job done whenever and wherever, eliminating the need for a second vehicle or hiring additional equipment. A DIVERTO connects to just about any tool with exceptional proportional control.



#### MOWER



#### GOLF COURSE MAINTENANCE

## EQUIPPED FOR A FERTILE CPK IIIG

NOW MORE THAN EVER. LANDSCAPERS ARE DEMANDING FAST AND EFFICIENT LOW-COST BASIC SOLUTIONS. IMAGINE USING ONLY ONE MACHINE FOR

You no longer need a truck and trailer to transport different single purpose machinery. You can drive the Diverto QS100 at 40km/h on public roads, carrying all the tools and materials necessary for the work at hand.




#### 100%

All Hydraulics and driving precision are Proportionally Controlled

## EQUIPPED FOR A HOT SUMMER

THE COMPACT SIZE OF THE QS100 ALLOWS YOU TO MANOEUVRE EASILY THROUGH DENSE URBAN AREAS. The QS100 being legally allowed to drive at 40km/h on the public road while pulling a trailer, you no longer need large transport equipment. The extremely powerful, multifunctional and compact DIVERTO QS100 allows you to negotiate village and city streets without causing road blockage or traffic jams.

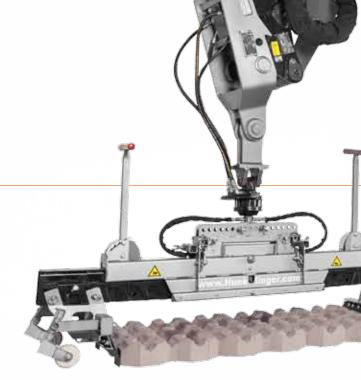



#### TRENCHER

REMOTE CONTROL

You can rotate the cabin at a 90° angle and drive sideways. In this position, you have a clear view of the ditch cutter and the direction ahead of you.



#### LIFTING PALLET FORK

All tools by DIVERTO partners for the loader function can be attached to the 3-Point Hitch. This means double functionality in two directions for synchronised combinations. THE CATEGORY II 3-POINT HITCH LIFTS UP TO 2.5 TONS

2.5<sup>TONS</sup>

LOAD, TRANSPORT, LIFT AND PICK & PLACE WITH JUST ONE MACHINE

#### DIRECTIONAL DRIVING

2 directional driving allows you to drive and steer in either direction with the selection switch.



If you connect the winch shield to your 3-point hitch and PTO, you will still have the unfolded disposal for a wood



For superior view of the wood chipper feeder, just switch on the remote in greater efficiency

multaneousl iminates the ne hile offering an ide/ ew of both tools




\* research conducted on behalf of Diverto INTERNATIONAL BV.

## EQUIPPED FOR ROUGH AUTUMN

EACH TIME YOU CONNECT TWO TOOLS, YOU ARE USING THE QS100 EFFICIENTLY, ELIMINATING THE NEED

The 100 HP Net John Deere engine gives you enough power and torque to use many functions, such as driving, slewing, 3-point hitch, PTO and the wood clamp simultaneously. Called synchronisation.

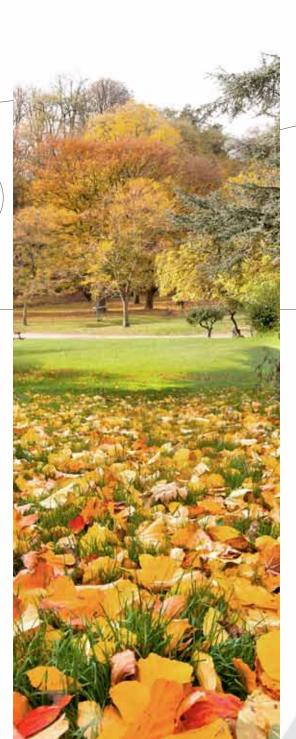

## EQUIPPED FOR HARSH NINTER

#### WINTER DEMANDS TOUGH MEASURES. THE DIVERTO QS100 GIVES YOU THE RIGHT TOOLS TO BATTLE SNOW AND ICE.

The hydrostatic driving propulsion gives you a traction of four tons. All tractor and boom hydraulics are proportionally controlled, including a boom-damping and boom-floating system, resulting in greater driving comfort.

#### SALT SPREADER TRAILER

Nido

The four different kinds of coupler units, 50mm, 80mm, Clevis and Pitonfix can be used to tow any kind of trailer.



HIGH CENTRAL SEATING FOR A SAFE AND CLEAR VIEW

#### 40<sup>KN</sup> TRACTION FOR SNOW PLOUGHING OR SNOW

THROWING

#### HYDROSTATIC DRIVE





#### SNOW THROWER

The 3PH holds and the PTO drives the tool at 540 or 1000 RPM with 48kW. Three proportional aux flow connections with 40L/min at 200bar.



#### SALT SPREADER

12V connection and three proportionally controlled hydraulic auxiliary flow connections.









## SAFE AND COMPACT

SAFETY ALL YEAR ROUND! AT 40 KM/H, ROAD VIEW IS BETTER THAN THE MARKET AVERAGE BECAUSE OF THE QS100'S RELATIVELY HIGH CENTRAL SEATING POSITION, YET THE TOTAL HEIGHT OF THE QS100 IS LESS THAN ANY OTHER ROTATING PLATFORM ON THE MARKET.

In folded transport mode, there is no engine hood and no boom kinematic system blocking your view in either the travel direction or to the sides. The large windshield and full glass doors are an industry benchmark. The small dead angle increases safety for you, your colleagues and other traffic substantially, especially in urban areas. In addition, the work and rotation mode has an exceptional short radius in comparison with similar engine power solutions.



## SIDE BY SIDE

DIVERTO TAKES "PILOT COMFORT" TO A HIGHER LEVEL. THE QS100 IS CERTIFIED AS AN ON-ROAD TRACTOR FOR 2 PERSONS WITH A MAXIMUM SPEED OF 40 KM/H ON PUBLIC ROADS AND IS ROPS/FO PS APPROVED.

Industry class widest doors on either side for superior entrance and exit

Passenger seat ensures comfort for a team of two, to and from work sites

Top window can be opened, giving a view of excavator boom in top position mirrors, which can be mounted on either side

Mirrors can be mounted on either side

Sun visor protects you from low sun

Left and right tiltable consoles suspended with seat

PATENTED





## FULL PROPORTIONAL CONTROL





#### LEFT JOYSTICK ALL CONTROLS PROPORTIONAL

- 1 Double hand safety button
- 2 Second boom section proportional
- <sup>3</sup> Proportional Auxiliary 3
- 4 Proportional Auxiliary 1

#### PILOT SEAT BY GRAMMER

- 1 Full comfort adjustable air-suspended seat with heating
- 2 Adjustable left and right consoles
- Right console adjustable in height and fore/aft
- 4 Integrated seat back extension
- Lumbar adjustment
- 6 Side support adjustment
- 7 Adjustable arm rests forward/back

#### SECOND KEYPAD

Secondary functions
 Power mode switch

#### RIGHT JOYSTICK CENTRAL CONTROL UNIT KEY PAD 1

- Proportional Auxiliary 2
- 2 Cruise Control hydrostatic drive speed
- 3 Forward/Neutral/Reverse (F/N/R)
- Full colour Multi Display with PIN code 10 All boom mower movements
- 5 Hand Throttle
- Engine Start / Stop

7 Proportional Boom Float
8 All tractor functions proportional
9 All wheel loader functions
10 All boom mower movements including slew/rotation



## HIGH QUALITY COMPONENTS

NETHERLANDS.

industry.

Our suppliers are based in Europe, Japan and America and are selected on the basis of their well-earned reputation for delivering high-quality products and services.



PATENTED

DIVERTO'S STRATEGY IS TO BUILD HIGH-END MACHINE SOLUTIONS THAT BENEFIT ITS CUSTOMERS, USING STATE-OF-THE ART MANUFACTURING METHODS. THAT IS WHY ALL STRUCTURAL COMPONENTS ARE ROBOTICALLY WELDED IN THE

The sandwich design frames result in weight reduction. Both the undercarriage and super-structure are dipped in corrosion-resistant cataphoretic zinc phosphate: high quality anti-corrosion treatment used in the automotive



# NORK HARD AND SMART





## HYDRAULIC POWER

Dual Brake Package.

Oscillating front axle + lock.

MAIN WORK PUMP AND VALVE Flow Sharing and Load Sensing.

Both axles 100% Differential Lock.

Front or Rear Wheel Steering: Reverse Steering.

Hydrostatic Drive: Closed Loop Full Proportional


- a. Work Drive Mode
- b. Transport Drive Mode
- c. Economic Drive Mode



PTO PUMP

2-Wheel & 4-Wheel Drive

Dual Brake Package.





- 1. 2-Wheel & 4-Wheel Drive
- 2. Differential Lock
- 3. Reverse Steering

DIVERTO QS100 is designed for true off-road work. To save fuel, the 2-Wheel Drive Mode is used on road. For tougher terrain, you can select the 4-Wheel Drive Mode. Switch on the100% differential lock for maximum traction. When driving in the direction of the 3-point hitch, the steering characteristics automatically adjust, preserving all comfort. Simply press Reverse Steering.

PATENTED

Air Brake, Hydraulic Brake, Electric 12V 7-pin and 3-pin connectors.

Top Linkage. Mechanically or Hydraulically adjustable.

Outside controls of the 3-Point Hitch and PTO for easy and safe tool coupling.


Up to 3x Proportional Hydraulic Auxiliary flow functions, max 40 l/min at 200 bar.

TRACTOR

3-Point Hitch Category II with 2.5 ton lift capacity: Lift, Push and Float Function.

The second s Scharmuller towing



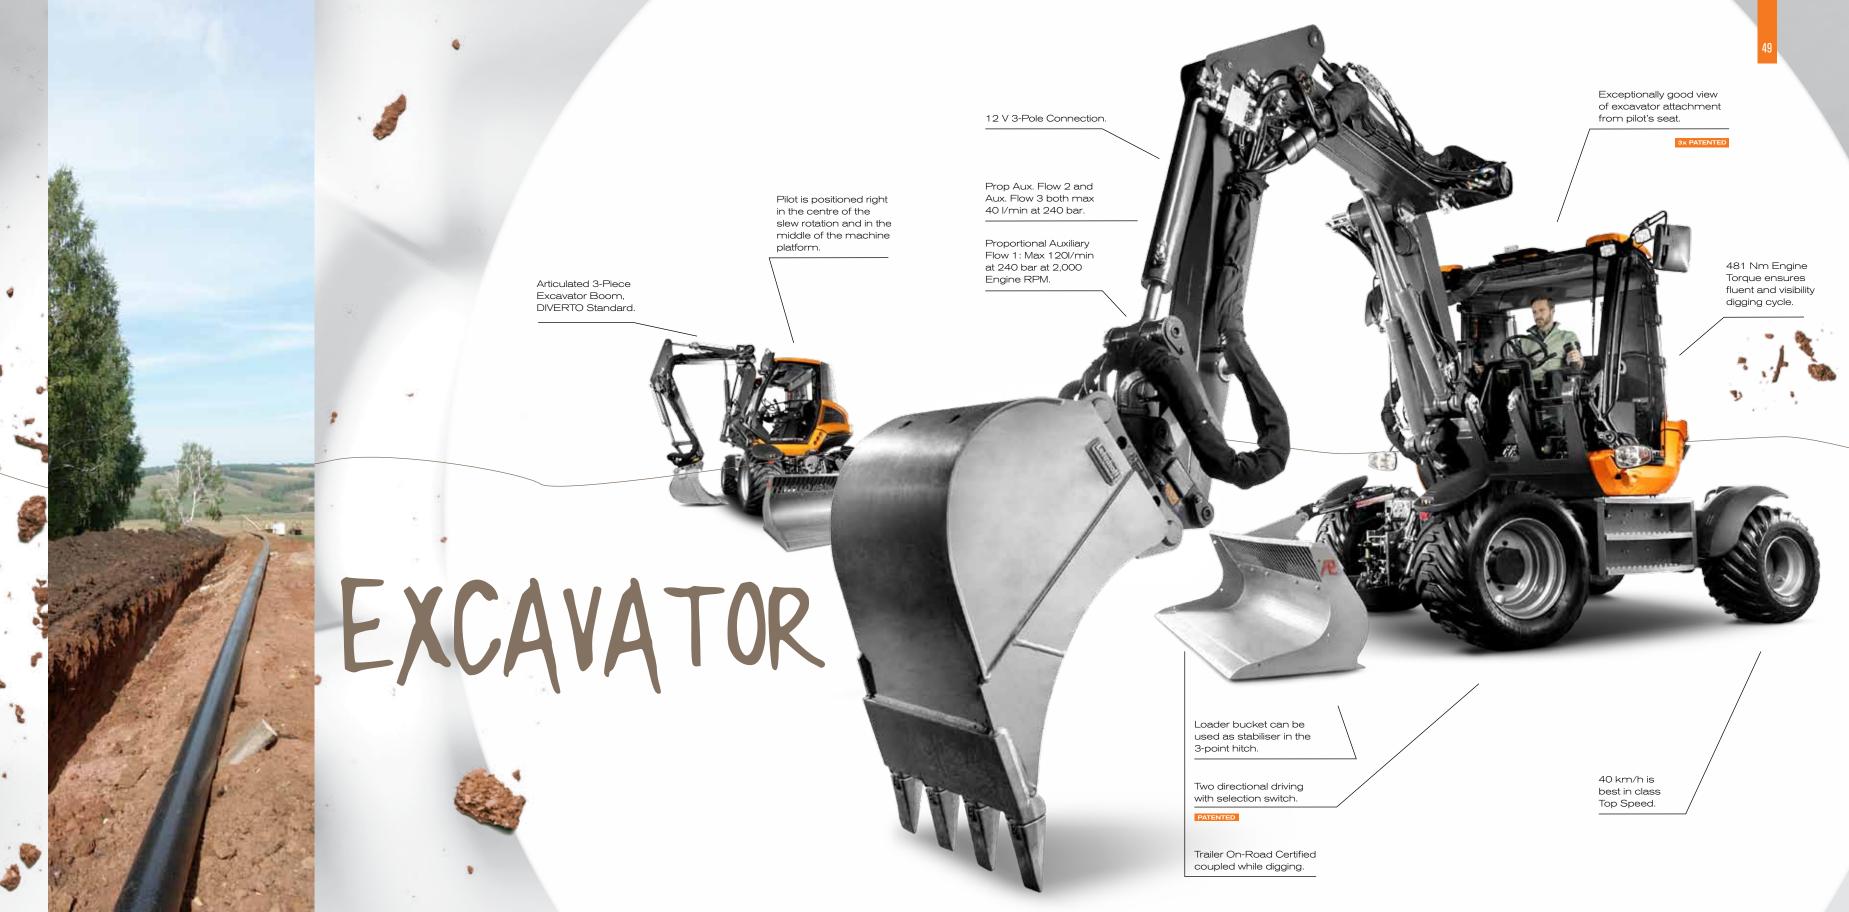



Central Pilot Seat Visibility and certified passenger space.

 $\sim$ 

All heavy technical components in rear, opposite the 360° lifting load.

Smaller wheels for Fork Lift Steering in Reverse Steering Mode.

PATENTE

. .

2-Directional Driving with "Reverse Steering" switch. 40 km/h best in class Top Speed. On-Road and Trailer Certified. Superior view of Boom Mower and 3-Point Hitch Tool.



40 km/h On-Road Certified Top Speed with attached trailer.

86 kW/115 HP with 481 Nm Engine Torque ensures professional and efficient mowing.

All heavy technical components are in the rear, opposite the 360° lifting load. This results in a low total mass and more efficient fuel consumption per meter.

> Proportional Auxiliary Flow 1: 120 l/minat 240 bar at 2,000 Engine RPM.

> > Prop Aux. Flow 2 and Aux. Flow 3 both max 40 l/min at 240 bar.

BL 300

TRILO

Proportional Boom Float for adjustable ground pressure for mowing.



Bucket float.

Cruise Control on Hydrostatic drive for constant mowing / ground speed. 3-Point Hitch / PTO attachment always available at Net 48 kW/65 HP.

PATENTED

DIVERTO.

2-Directional Driving with "Reverse Steering" switch. Provides more efficient and safe manoeuvring.

PATENTE

## BOOMER







Tilting the cabin using the 2-cylinder Hand Pump on left side takes just a few minutes including safety measures.

Left and right side covers can be easily removed for Cabin Filter and Electronics. Cap Tilting 48° in both loader and excavator mode. Engine Hood Tilting with 2m vertical clearance, also possible while 3-Point Hitch Tool is coupled.

Counter Cover can be easily removed for exceptional access to engine and hydraulics.

PATENTED

PATENTED

Left side service access for Diesel, Engine Oil Check, Cooling Fluid, Battery and Air Filter. Right Side Box containing all controls of the under carriage. Centralised for easy maintenance.



## SUPERIOR SERVICE

DIVERTO has designed and engineered the QS100 platform from scratch.

Maintenance access, speed and comfort were priorities. Along the way we have developed innovative solutions and patented them. In any of the four operating modes, you simply tilt the hood for easy daily checks and filling up. For secondary maintenance the side skirts can be removed. To reach all the components, the cabin can be tilted using the hand pump. The counter-cover can be removed by loosening the 6 bolts.

An incredibly compact, easy-maintenance machine with an exceptional John Deere Tier 4i/Stage IIIB Power source.

## COMFORT CLASS LEVELS

#### Remote control



Diesel pre-heating of cabin and engine







Radio - Multimedia Set - Pioneer AVIC



50 mm Ball coupler



80 mm Ball coupler





Clevis coupler

Piton-Fix



THE DIVERTO QS100 IS PRODUCED IN THREE VERSIONS, NAMELY THE REV, PRO AND MAX. ALL THREE HAVE THE SAME ENGINE CAPACITY. HYDRAULIC POWER AND FUNCTIONAL CAPABILITIES. THE REV. PRO AND MAX GENERALLY DIFFER IN COMFORT CLASS AND HYDRAULIC FUNCTIONS.

The REV version is the well-equipped basic model with an open cabin, a standard boom, bucket-float and ride control. The PRO version includes all REV features and more. Additional features include a third auxiliary 40 L/min boom flow, boom-float proportional control, reverse steering, two rear auxiliary flows of 40L/ min 200 bar each, heating and air-conditioning system, outside work lights and radio. The MAX includes all REV and PRO features and comes with extras such as the remote control unit, GPS system, rear view camera, diesel pre-heating of cabin and engine, second 12V battery and a third rear auxiliary flow of 40L/min.



THE DIVERTO QS100 IS A POWERFUL MACHINE WEIGHING ONLY 6.2 TONS. THE MACHINE CAN BE EQUIPPED WITH THE FOLLOWING TYRES:

Trelleborg TWIN 404 flotation tyres are used for softer surfaces. These are ideal for landscaping, golf courses and parks.

HBI GSP+ all-road tyres are especially designed for industrial work on more solid surfaces.



**DIVERTO STYLE** 

## DIVERTO STYLE OF WORKING

#### DIVERTO BELIEVES IN HONEST HARD WORK. HOURS SPENT UNDERNEATH PERFECT BLUE SKIES, BUT ALSO IN BLIZZARDS. IF YOU WORK HARD, YOU HAD BETTER WORK SMART.

All the devices and tools you take with you on the job not only perform better than before, they also truly assist you with a much wider range of applications in a very compact package, now called Apps. That's mobile! That's smart! This concept is increasingly applied in machine platforms by means of standardised attachments, quick coupler systems and tilt-rotators. It is a matter of plug and work.

DIVERTO uses this same principle and takes it to a whole new level, a new style of working. Consider the following situations, and how your resources result in output.














59

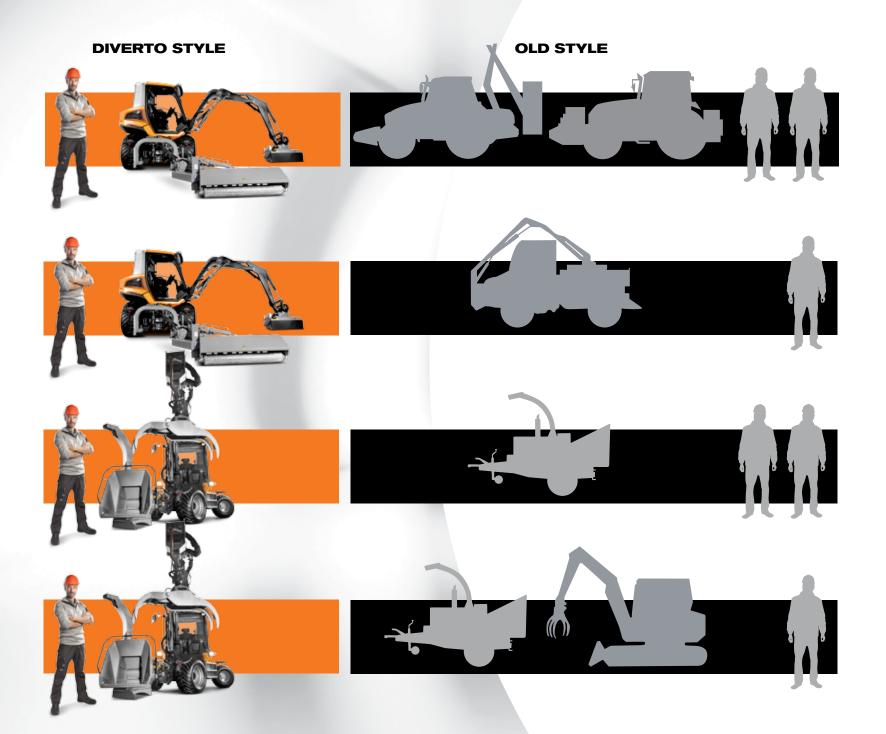


**DIVERTO STYLE** 








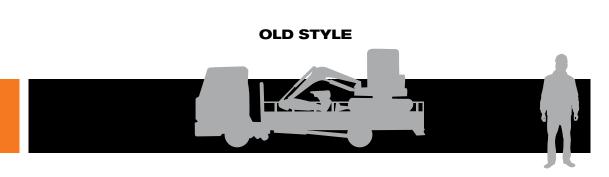





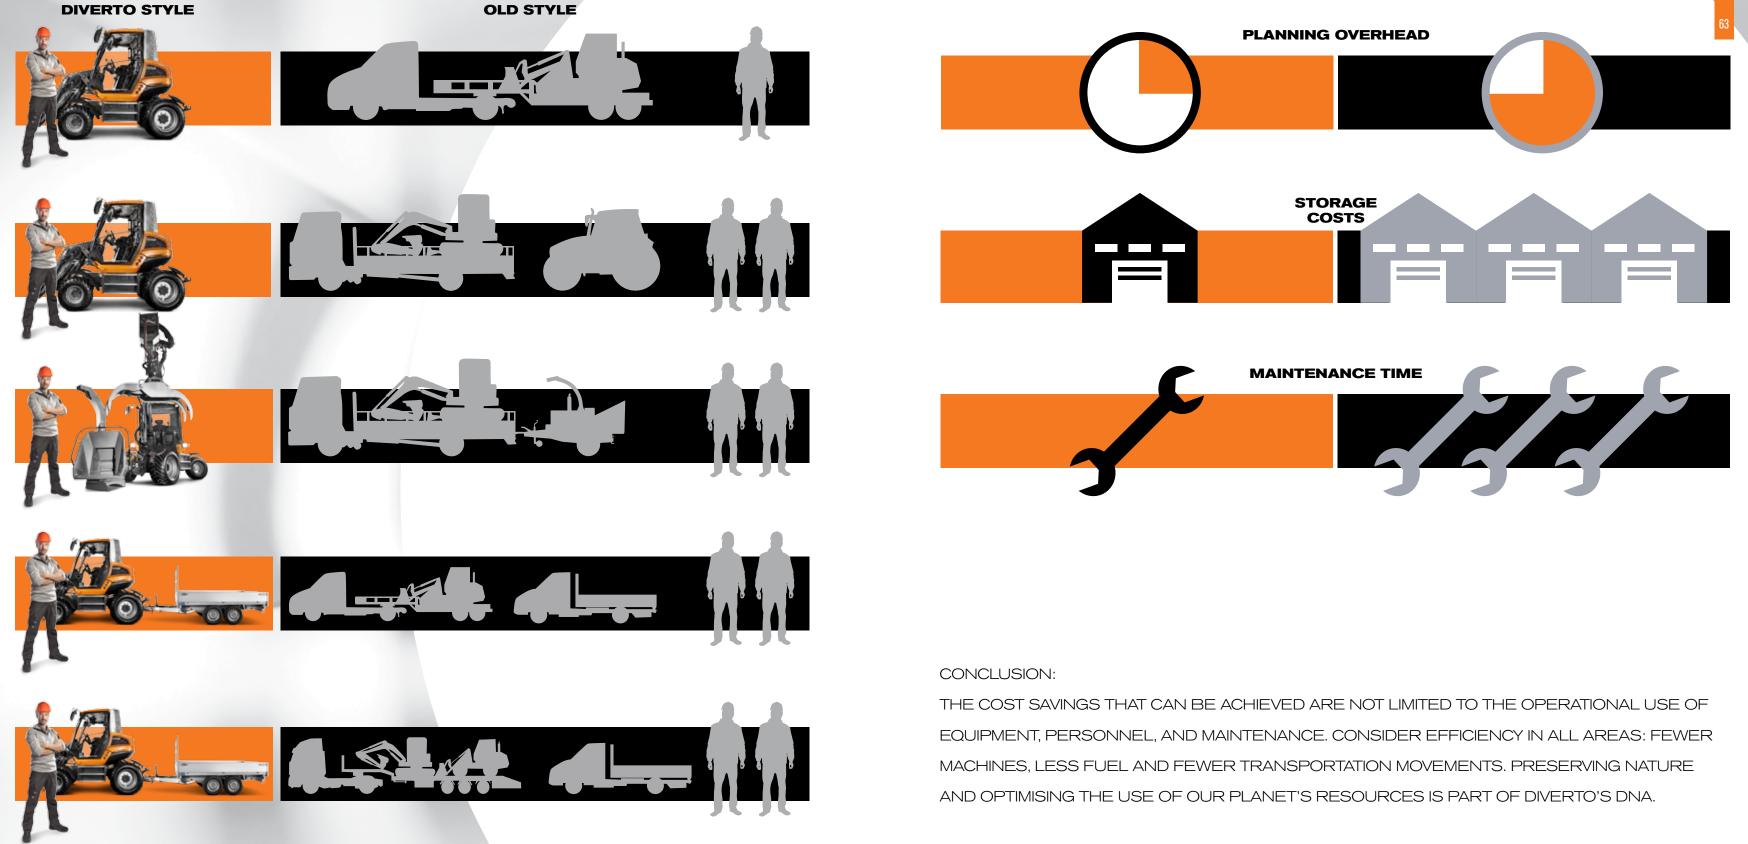

## WARRANTY AND FINANCING

WARRANTY: Every DIVERTO QS100 is carefully engineered and built, using only top quality components. This is why we offer a choice of one to four-year of limited warranty periods.

FINANCING: DIVERTO is proud to announce its cooperation with De Lage Landen Financial Service (DLL). DLL, a Rabobank Groep subsidiary, is an international provider of asset financing, vendor leasing and other commercial financing products. DLL is located in over 35 countries worldwide.

- arrangements are customised.
- Approval for leasing a DIVERTO QS100 can often be given by lower level management.


Please contact your DIVERTO dealer to explore the options for leasing your own DIVERTO QS100.

#### THE ADVANTAGES OF LEASING A DIVERTO QS100:

- No immediate large cash out, allowing you to free up working capital.
- Certainty of equally spread costs, avoiding unforeseen cost fluctuations.
- Possible fiscal advantages of leasing. Please check this with your auditors.
- Replacement of machinery is made easier, your future demands can be met better. Such

#### de lage landen 🍊

## TOOL PARTNERS

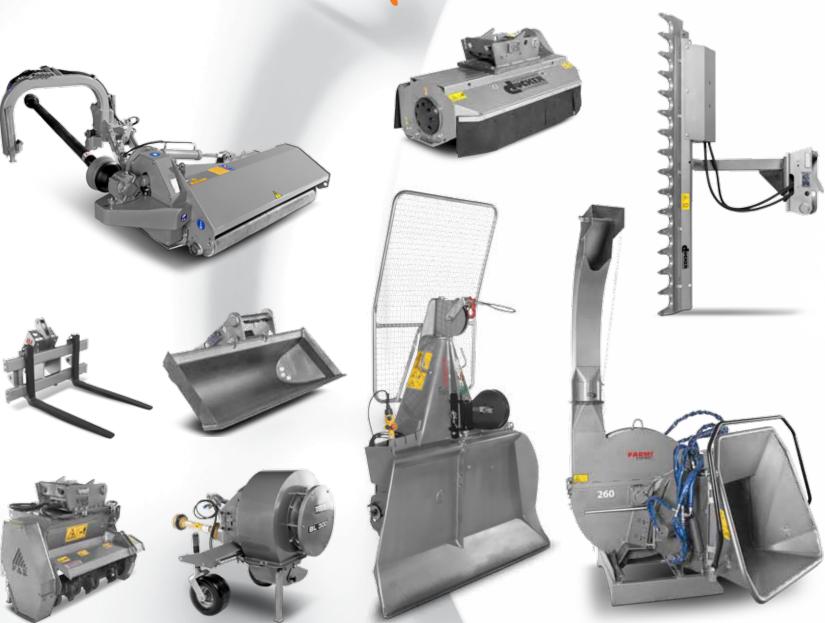


THE DIVERTO QS100 GIVES YOU THE OF TOOLS, ENABLING YOU TO DO OF TOOLS THAT FIT THE DIVERTO QS100.



FLEXIBILITY TO ATTACH A WIDE RANGE ALMOST ANY KIND OF JOB. THE MARKET OFFERS UP TO 200 DIFFERENT KINDS

DIVERTO has made a selection of recommended suppliers. Most of the attachments are standardised; some tools have been altered to improve performance on a DIVERTO QS100.

Our preferred tool partners are Dücker, FAE Group, Farmi Forest, HBI Tyres, Herder, HKS Construction Technology, Lehnhoff, OilQuick, Pladdet, Trelleborg Tyres and Trilo.

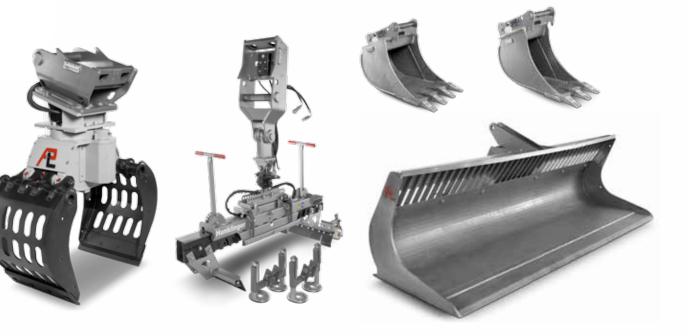


## SPECIFICATIONS

GENERAL	specification	Units	QS100	GENERAL category	specification	Units	QS100	<b>GENERAL</b> category	specification	Units	QS100	EXCAVATOR	specification	Cnits	QS100
					Width [total]	mm	2145		Full glass doors	nr	2	Digging / Craning Geometr	Digging / Cutting height y	mm	5400
Engine	Engine Mark / Type		John Deere PowerTech 4045HFC92		Width [transport]	mm	2145		Width Doors Entrance Level	mm	1100		Dump height	mm	3640
	Cylinders	nr	4		Length [total]	mm	4900		Door LEFT		Yes		Horizontal digging reach ground	mm	5800
	Valves / Cylinder	nr	4		Length [transport]	mm	4420		Door RIGHT		Yes		Digging depth	mm	3200
	Balancer Shaft	nr	2		Height [total]	mm	2770		Width Front Wind Shield	mm	1300	Capacities	Crowd force dipperstick	kΝ	22
	Volume	L	4,5		Height [transport]	mm	2755		Heater power (Stepless)	kW	10		Bucket digging force	kN	41
	Speed max	RPM	2200		Cabin width internal	mm	1530		Air Cond. Power (Stepless)	kW	5,2	Lift Capacities ISO 10567	Lift Cap Front - Om High - 3m Out	kg	1892
	Gross Engine power	kW	86		Cabin height internal	mm	1445	Safety	ROPS		Yes		Lift Cap Front - Om High - max Out	kg	1527
	Gross torque	Nm	481		Fuel Tank Capacity	L	120		FOPS		Yes		Lift Cap Front - 1 m High - 2m Out	kg	4524
	Fuel consumption	g/kwh / RPM	219		Hydraulic Tank Capacity	L	130	Extras	Full colour display		Yes		Lift Cap Front - 1 m High - max Out	kg	1157
	Diesel Pre-Heat (Engine/Cab)	nr	1		Hydraulic System pressure	bar	250		Remote control		Yes		Lift Cap Front - 2m High - 2m Out	kg	2888
Drive	Propulsion type		Hydrostatic 2WD / 4WD		First Auxiliary Flow	L/min	120		Rear camera		Yes		Lift Cap Front - 2m High - 3m Out	kg	1514
	Automotive drive		Yes		Second Aux.flow rate	L/min	40		Radio		Yes		Lift Cap Rear - 1m High - max Out	kg	600
	Gears	nr	2 + Crawl		Third Aux. Flow rate	L/min	40		Navigation		Yes		Lift Cap Rear - 2m High - 3m Out	kg	1423
	Top speed (1 st)	Km/h	14	Cabin	Sunvisor		Yes		2-way driving Cabin		Yes		Lift Cap Side - 1m High - 2m Out	kg	3000
	Top speed (2th)	Km/h	40		Storage box		Yes		Function priority selection		Yes		Lift Cap Side - 1m high - max Out	kg	653
	Traction force Max Low Speed	Kn	39		Windscreen wiper (front)		Yes		Ball hitch		Yes		Lift Cap Side - 2m high - 2m Out	kg	2575
	Steering angle	degrees	40		Windscreen washer (front)		Yes		Towing hitch (On-road Homologa	ted)	Yes		Lift Cap Side - 2m High - max Out	kg	783
	Turn radius	mm	5150		Openable window		Yes		Air Compressor / Tank		Yes		Boom floatation		Ja
	Angle of oscillation Total	degrees	13	Ergonomics	Air suspended seat		Yes		Air brake for trailer		Yes		Bucket floatation		Ja
Electrics	System voltage	V	12		Extra seat in cabin		Yes		Hydraulic Brake for Trailer		Yes		Adjustable boom floatation		Ja
	Alternator ampere	Amp	200		Central seat position		Yes		Quick Coupler prepared (Aux Flov	v Integrated)	Yes		Dozer blade floatation		Ja
Dimensions	Operating Weight	Kg	6350		Cabin noise [dB] (2009-76 EG)	dB(A)	79,5					Swing	Swing speed	RPM	10
Dimensions / capacities	Ground pressure	kPa			Outside noise [db] (2009-63 EG)	dB(A)	76						Swing lock Switch Controlled		Ja
					Adjustable steering column		Yes						Swing torque	kNm	10
													Tail over	mm	370

<b>EXCAVATOR</b> category	specification	L nits	Q\$100	LOADER	specification	Units	Q\$100	TRACTOR	specification	Units	QS100	MOWING	specification	Units	Q\$100
Comfort	Cabin rotates with boom		Yes	Loading Geometry	Dump height	mm	2300	3 Point-Hitch	3 Point-Hitch	Cat.	2	Geometry	Horizontal Mowing reach with Vertical Mower	mm	5500
	Ride control / Damping		Yes		Height hinge pin	mm	3156		Lift capacity 24" behind pins	Kg	2500		Hor. Mow reach w Hor. Mower	mm	5700
Safety Precautio	n Safety valves on ALL booms (EN 4	174-5)	Yes		Max Stacking Height Fork	mm	3000		Floating hitch		Yes		Mowing height	mm	5700
Agricultural	3-point hitch		Yes		Reach at max height (bucket horizontal)	mm	1300	PTO	PTO output 540 RPM	kW	45		Mowing dept at 45°	mm	4400
	PTO available		Yes		Reach Horizontal (Bucket Horizontal)	mm	2200		PTO output 1000 RPM	kW	45	Performances	Boom floatation		Yes
	, 4	4100			Dump angle	degrees	45		Extra prop. PTO auxiliary flow 1	L/min	40		Bucket floatation		Yes
					Rollback angle ground	degrees	35		Extra prop. PTO auxiliary flow 2	L/min	40		Adjustable boom floatation		Yes
↑				ISO 14397-1	Tipping load straight bucket	Kg	2250		Extra prop. PTO auxiliary flow 3	L/min	40		3-piece boom		Yes
				ISO 14397-1	Tipping load straight pallet	Kg	2100		Trailer Towing Capacity no brakes	Kg	1042	Slewing	Slewing angle	degrees	360
		17 14		ISO 14397-1	Tipping load straight bucket Full Wheel Turn	Kg	2200		Trailer Towing Capacity with hydraulic or air brakes	Kg	4895	Agricultural	3PH available		Yes
				ISO 14397-1	Tipping load straight pallet Full Wheel Turn	Kg	2250						PTO available		Yes
5400	de la	17			Bucket breakout force	Kn	36						Boom and Cabin Rotate		Yes
					Boom floatation		Yes						Bucket floatation		Yes
					Bucket floatation		Yes						Boom floatation		Yes
	ν γ				Adjustable boom floatation		Yes						Boom floatation Proportional		Yes
$\downarrow$		0			Lift time (loaded)	Sec	5,5								
					Lowering time	sec	5,5					$\uparrow$			
					Dump time	sec	3								
	100 × -				Crowd time	Sec	2							and a second second	
					Slewing angle	degrees	360								
					Slewing speed	RPM	10		45°		$\uparrow$	5700	nín 🎢	7-610	
		9 25			Slewing lock		Yes	C					100		
					Cabin rotates with boom		Yes	Č	300 300		2770				
					Ride control / Damping		Yes				5			í <u> </u>	
		5			3PH available		Yes		↓ ↓ ↓ 35°				N		
3200					PTO available		Yes		\$ <u>90</u> °	2200			4	45°	



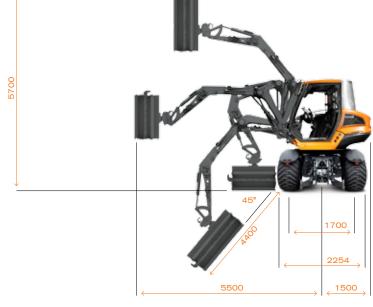

#### WWW.DIVERTO.COM



DIVERTO INTERNATIONAL BV. All rights reserved. All research is conducted by DIVERTO. All statements are made under the strict supervision of DIVERTO. If any of the statements should be false or incorrect, DIVERTO may consider altering these. The claims and statements in this document are not legally binding and are subject to change. No legal obligations can be derived from this document.